

# The Original Cleanroom Friendly Vacuum Sealer

The Model 35 features our cleanroom friendly design with isolated exhaust port, stationary vacuum nozzle and no moving parts to generate particles.

# MODEL 35

For over a decade, the Accu-Seal 35 Vacuum Sealer has become the time-tested industry standard for table top Vacuum Sealing or Gas-Vacuum Sealing. This is particularly true in the demanding electronics Cleanroom environments for which they were designed.

## LEAD THE FIELD

Accu-Seal leads the field of table top
Vacuum Sealers. We were first to
combine cleanroom friendly venturi
vacuum generators and a clean exterior
design with our exclusive independent
vacuum and heat seal jaw design. This

maintains consistent vacuum levels and leak proof seals over a longer productive life.

## **EXCEPTIONAL VALUE**

Superior design, advanced manufacturing techniques, quality testing, and our two year warranty - typical of the engineering excellence built into every Accu-Seal machine.

# **SOLUTIONS**

The perfect solution for packaging products that are moisture and oxygen sensitive.









# MODEL **35**

## **VACUUM ACCU-SEALER**

#### **CLEANROOM FEATURES**

- Non-Particle Generating Venturi Vacuum System
- Clean Design (To Class 100)

#### **BUILT-IN FEATURES**

- 10 Second Adjustable Electronic Gas Timer (Gas/Vac Model)
- 60 Second Adjustable Electronic Vacuum Timer
- 10 Second Adjustable Electronic Heat Timer
- 60 Second Adjustable Electronic Cool Timer
- Electronic Foot Switch Activator: Can also be used to extend or override vacuum timer
- Jaw-Closed/Heat-Only Safety Circuit
- Operating Mode Switch:

Gas-Vacuum-Seal Sequence (Gas/Vac Model) Vacuum-Seal Sequence Seal Only

- Gas Pressure Regulator and Gauge (Gas/Vac Model)
- Vacuum Gauge

#### **SPECIFICATIONS**

• Seal Lengths: 20", 25", 30" and 35"

• Seal Width: 1/4" Standard

Other Widths & Styles Available

- Vacuum Pressure: Up to 26 in Hg Standard
  Suction Flow: Up to 4.8 CFM (1.4 Standard)
- Requirements:

Power: 120 Vac, 7 Amps (20"), Air: 1.0 CFM @ 80 PSI • Size: Length - Seal Length +5.5"

Width: 9.5"

Height: 8.5"


• Approximate Weight: 26-40 lbs.

#### **FACTORY OPTIONS & ACCESSORIES**

- Gas Purge System
- 220 Vac Conversion
- CE
- Product Support Tray
- Ergonomic Multi-Position Accu-Seal Stand
- Standard Industrial Air Compressor
- Ultra-Quiet Lab / Office Compressor
- Portable Accu-Sealer Cart

# MOISTURE INSURANCE

The Accu-Seal 35 helps insure the integrity of your products. When used with a heat sealable, electrostatic safe (ESD), moisture vapor barrier bag with desiccant and humidity indicator card, it provides the maximum protection against moisture and oxygen contamination.

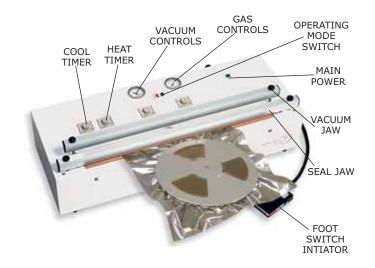

# TWO-YEAR LIMITED WARRANTY

The Accu-Seal Model 35 was designed, built, and tested to give years of reliable, trouble free service.



OPTIONAL PORTABLE ACCU-SEALER CART (SHOWN W/INDUSTRIAL COMPRESSOR)



OPTIONAL ERGONOMIC MULTI-POSITION ACCU-SEAL STAND (SHOWN W/ MODEL 635-232



OPTIONAL ULTRA-QUIET LAB/OFFICE COMPRESSOR



# 北京韩卢科技发展有限公司

Beijing Hanlu Development Co., Ltd.

地址:北京市西二环菜户营58号财富西环2306室 邮编:100054 电话:010-63357760 63356874 传真:010-63356974 邮箱:hanlu@hanlu.com.cn 网址:http://www.hanlu.com.cn



225 Bingham Drive, Suite B San Marcos, CA 92069 800-452-6040 • 760-591-9800 FAX 760-591-9117 www.accu-seal.com e-mail: info@accu-seal.com

